



OpreX™ Data Acquisition

SMARTDAC+
Data Acquisition & Control



Paperless recorder GX/GP

SMARTDAC+™

Data Acquisition & Control

Your business environment is complex and fast changing.
 You need smart and powerful systems that can adapt to your process.
 SMARTDAC+ is a fresh approach to data acquisition and control,
 with smart and simple touch operation as a design priority.
 Measure, display and record process data with greater
 levels of clarity, intelligence and accessibility.
 The SMARTDAC+ concept begins with the all-new GX/GP,
 an integrated I/O and recording system
 with a familiar touch operator interface.
 Highly adaptable, very capable and
 easy to operate is the new GX/GP.

Now that's SMART.

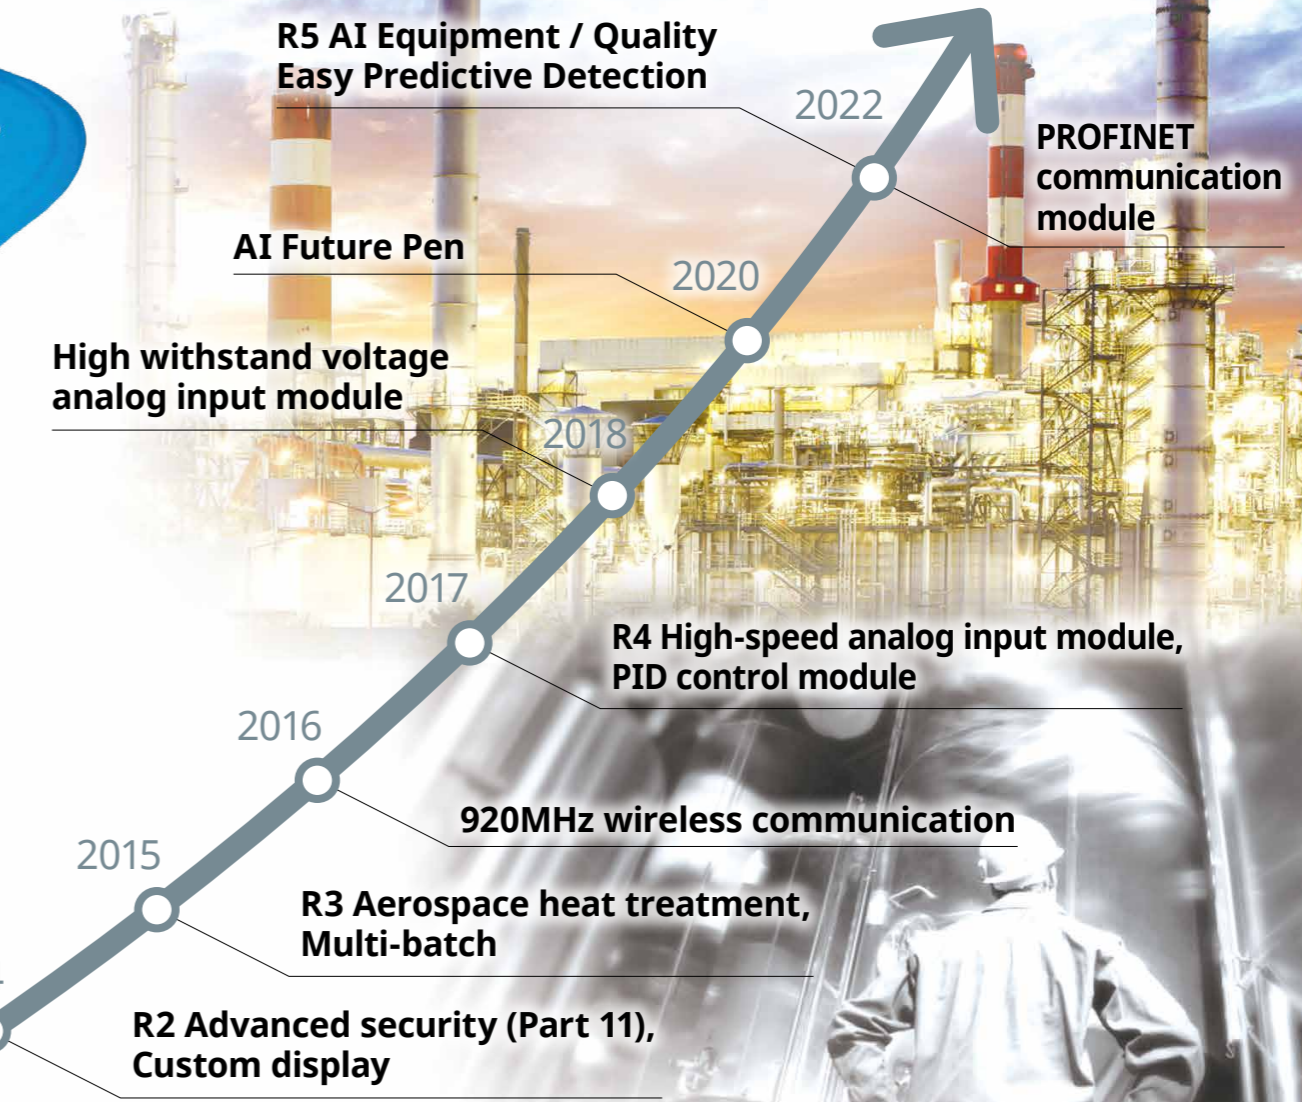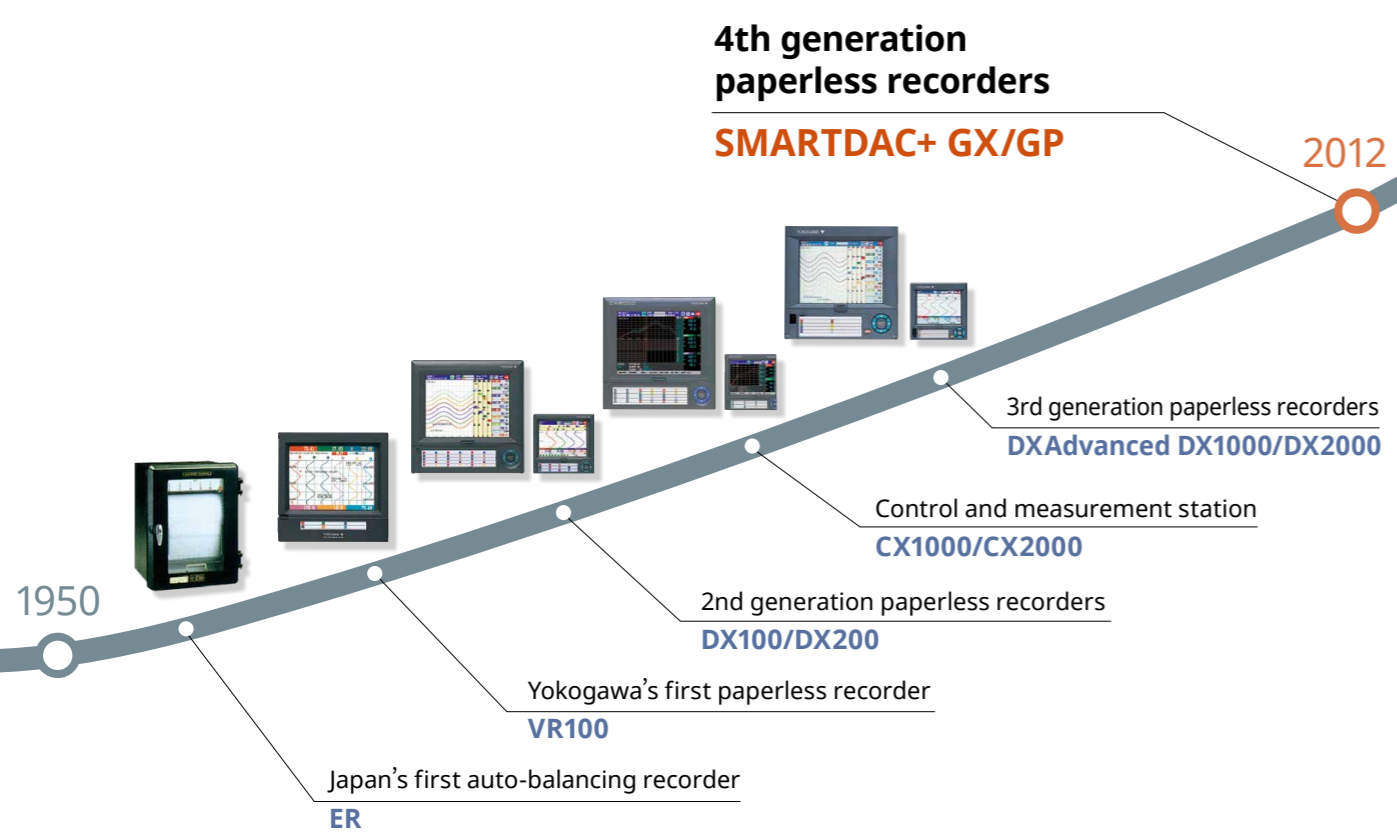

What's New



Future Pen
Equipment / Quality
Easy Predictive Detection

Display & operation

- Arrange screens any way you like with the Custom Display function (option)
- Wide variety of powerful display functions
- Touch screen for greater ease of use
- Remote monitoring and setting control from a web browser



Data use

- Automatically print reports
- Powerful software for a variety of tasks including data analysis, settings, and acquisition
- Save to binary or text format
- SLMC Communication (Mitsubishi PLC)
- PROFINET Communication (GX90NW)



Recording

- Supports long term multi-channel recording
- Redundancy through internal memory and external media
- Saves binary data for enhanced security (also supports plain text)



Measurement

- Inputs and outputs that support a wide range of DUTs (device under test)
- Modular construction for expandable input/output
- Multichannel measurement on up to 450 channels
- Pulse signal data acquisition with integration
- Supports high withstand voltage applications (600 V double insulation, 1000 VDC basic insulation)

Reliable technology

Proven reliability over a wide range of applications



Navigate with ease

Smart User Interface

- Observe**
 - Wide variety of display formats
 - Powerful data search functions
 - Alarm/Status indicator functions
- Interact**
 - Touch screen for intuitive operation
 - Easy-to-navigate, user-oriented design
 - Supports freehand messages



Ready for the future when you are

Smart Architecture

- Adapt**
 - Add I/O modules as needed
 - Wide ambient temperature operation
 - Locking front panel for media security
- Measure**
 - Wide range of I/O modules
 - Multichannel I/O
 - Easy-to-read screens



Data analysis made simple and mobile

Smart Functionality

- Record**
 - Future data drawing
 - Equipment/quality predictive detection
 - Convenient document creation function
- Connect**
 - Browser-based real time monitoring
 - Centralized data management via FTP server
 - Powerful networking functions






An intuitive UI engineered for ease-of-use

Smart User Interface

Efficiently search for key data

Easily review historical data

Seamless display of historical trends—flick or drag the trend display to scroll through the data, even during measurement.

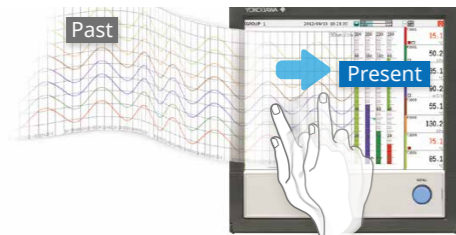

Flick

Quickly find data using calendars and summary screens

From a calendar, jump to waveforms of a specific date. From the alarm summary, jump to the waveform active during the alarm.




Historical trend screen

Easily check off trouble spots

Write freehand messages


Immediately clear areas of concern with a hand-written message.

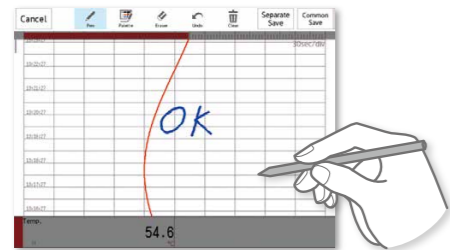

You can draw or hand-write on the waveform area using a stylus (standard accessory) or the tip of your finger. You can even select a color and line width. Alternatively, you can select from a list of preset messages.

Save and output image files

Save trend waveforms of interest or screens displayed during alarms as image (PNG) files, and print them out at the same time.

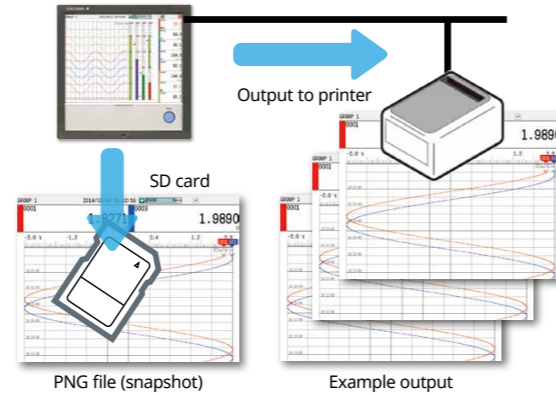


PNG file (snapshot)

Example output

Check waveforms of concern in detail

Display digital values at any location


Move the scale to display the value corresponding to that position as a numeric value. Instantly check maximum/minimum measured values.



[Patent technology]

Ascertain long-duration trends at a glance


All historical trends display Long-duration trends can be fitted to a single screen for easy viewing.



All historical trends display

Zoom in/out - time axis and engineering units

The time axis and engineering axis can be expanded and compressed using a simple pinch together or apart function.




Pinch apart / Pinch together

Create your own screens

Custom display (/CG option)


You can arrange display objects such as trend, numeric, and bar graphs any way you like to create monitor displays that are customized to the environment. Start/stop pumps and perform other operations.

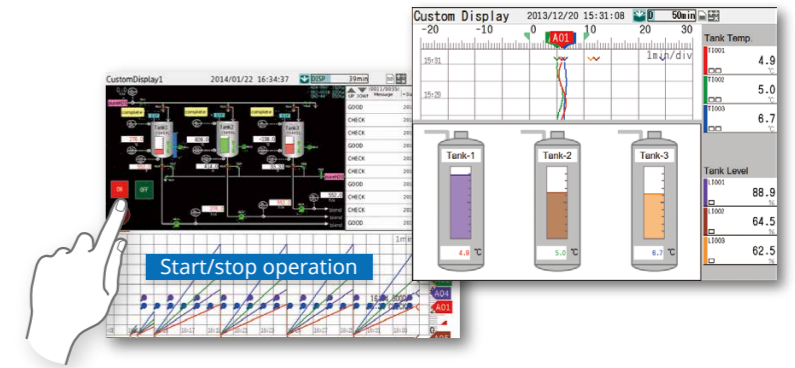


Custom display building software

DAQStudio DXA170


DAQStudio is software for creating custom displays. You can load screens you created onto the GX/GP via Ethernet or external memory media (SD/USB) and display them.

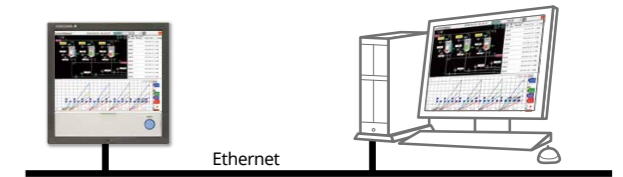

Common objects used in custom displays (DAQStudio)

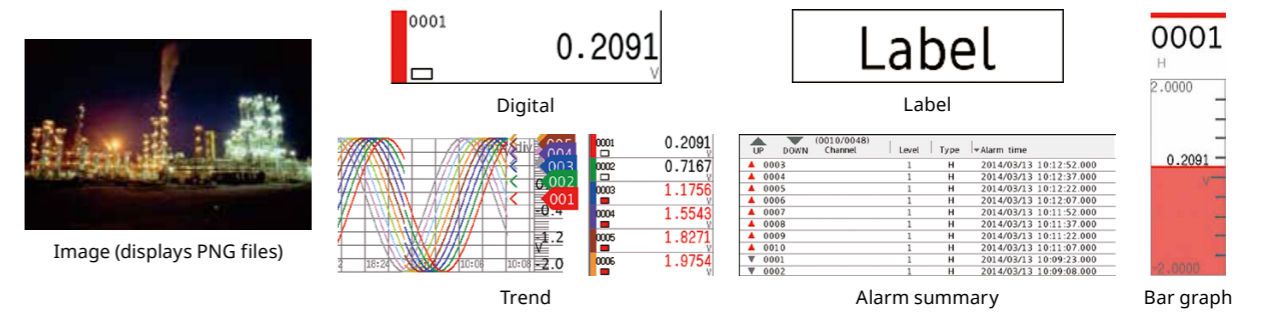

Variety of display screens

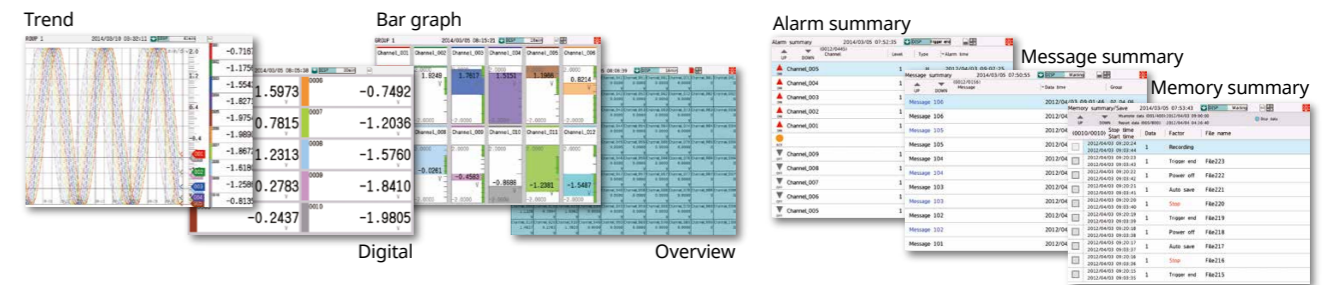


Physical quantities are displayed and recorded on a log scale.

Log scale display (/LG option)





Log scale



Multi-panel display

You can select from 9 layouts, and save up to 20 configurations. (Multi panel available on the GX20/GP20 only)

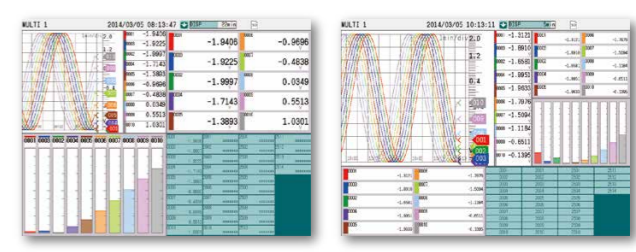




Highly flexible and scalable architecture

Smart Architecture

Modular input/output

Inputs and outputs are modular for easy expandability. The GX/GP multichannel paperless recorder main unit alone provides up to 100 channels (GX20/GP20) of measurement.

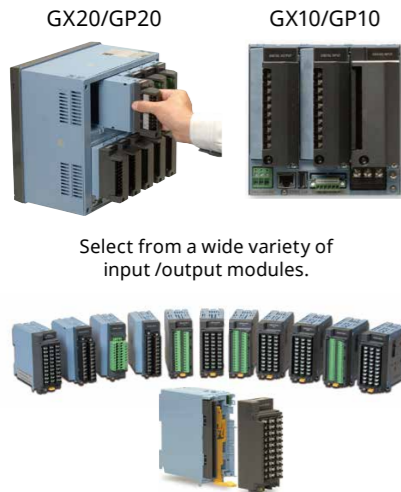

Select from a wide variety of input/output modules.


The I/O terminals are detachable.

Model	Name	Measurement/Application	No. of channels ¹⁾	Channels
GX90XA-10-U2	Analog input module	DC voltage, thermocouple, RTD, contact (solid state relay scanner type)	10	10
GX90XA-10-L1		DC voltage, thermocouple, contact (Low withstand voltage solid state relay scanner type)	10	10
GX90XA-10-T1*		DC voltage, thermocouple, contact (electromagnetic relay scanner type)	10	10
GX90XA-10-C1		DC current (mA) (solid state relay scanner type)	10	10
GX90XA-10-V1		DC voltage, thermocouple, contact (Solid state relay scanner type), High withstand voltage (600 V double insulation, 1000 VDC basic insulation)	10	10
GX90XA-04-H0*		DC voltage, thermocouple, RTD, contact (individual A/D type)	4	4
GX90XA-06-R1	Analog output module	4-wire RTD, 4-wire resistance (solid state relay scanner type)	6	6
GX90YA*		Current output	4	4
GX90XD*	Digital input module	Remote control input or operation recording	16	16
GX90YD*	Digital output module	Alarm output	6	6
GX90WD*	Digital input/output module	Remote control input or operation recording/alarm output	14	DI:8/DO:6
GX90XP	Pulse input Module	Pulse signal data acquisition, integral count	10	10
GX90UT*	PID control module	PID control (2 loop)	26	AI:2/AO:2 DI:8/DO:8

* = Mounting restrictions apply. See the general specifications for details.
*1: Large memory model required if the total number of channels installed exceeds 100.


Expandable to up to 450 channels (real actual input)

Supports up to 450 channels of measurement. Note that if MATH and communication channels are included, the GX20/GP20 large memory type can record on up to 1000 channels. The GX/GP main unit and expandable I/O can both use the same input/output modules.

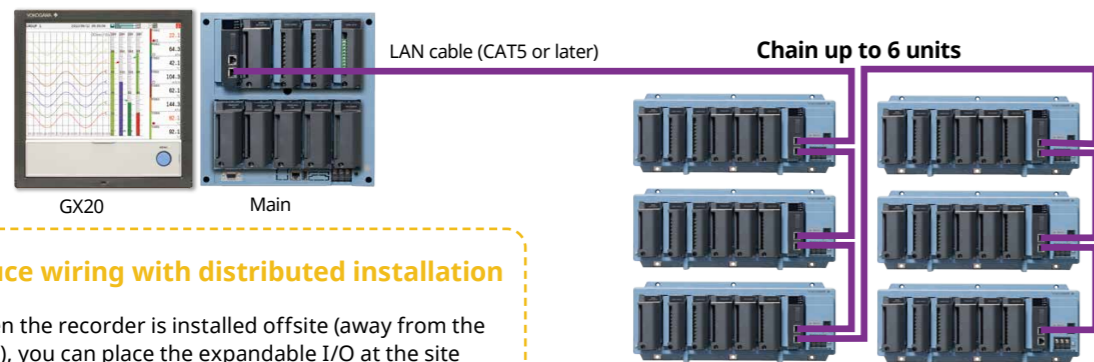

Reduce wiring with distributed installation

When the recorder is installed offsite (away from the DUT), you can place the expandable I/O at the site and monitor data without the need for long-distance wiring of thermocouples and other sensors.

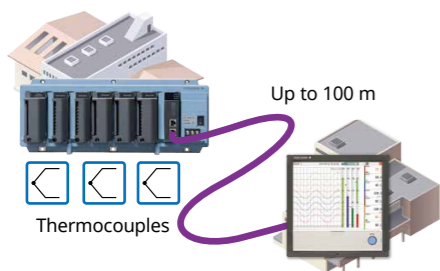


The maximum distance between units is 100 m. You connect directly with a LAN cable without connecting through a hub or repeater.
* You can also connect subunits of the GM Data Acquisition System.

Model	Type	Max. channels	Number of channels by configuration
GX10/GP10	Standard	100ch	Main unit only
			Main + expandable I/O
GX20/GP20	Standard	100ch	Main unit only
			Main + expandable I/O
	Large memory	450ch	Main unit only
			Main + expandable I/O


The number of channels is for analog input only.

Component Names

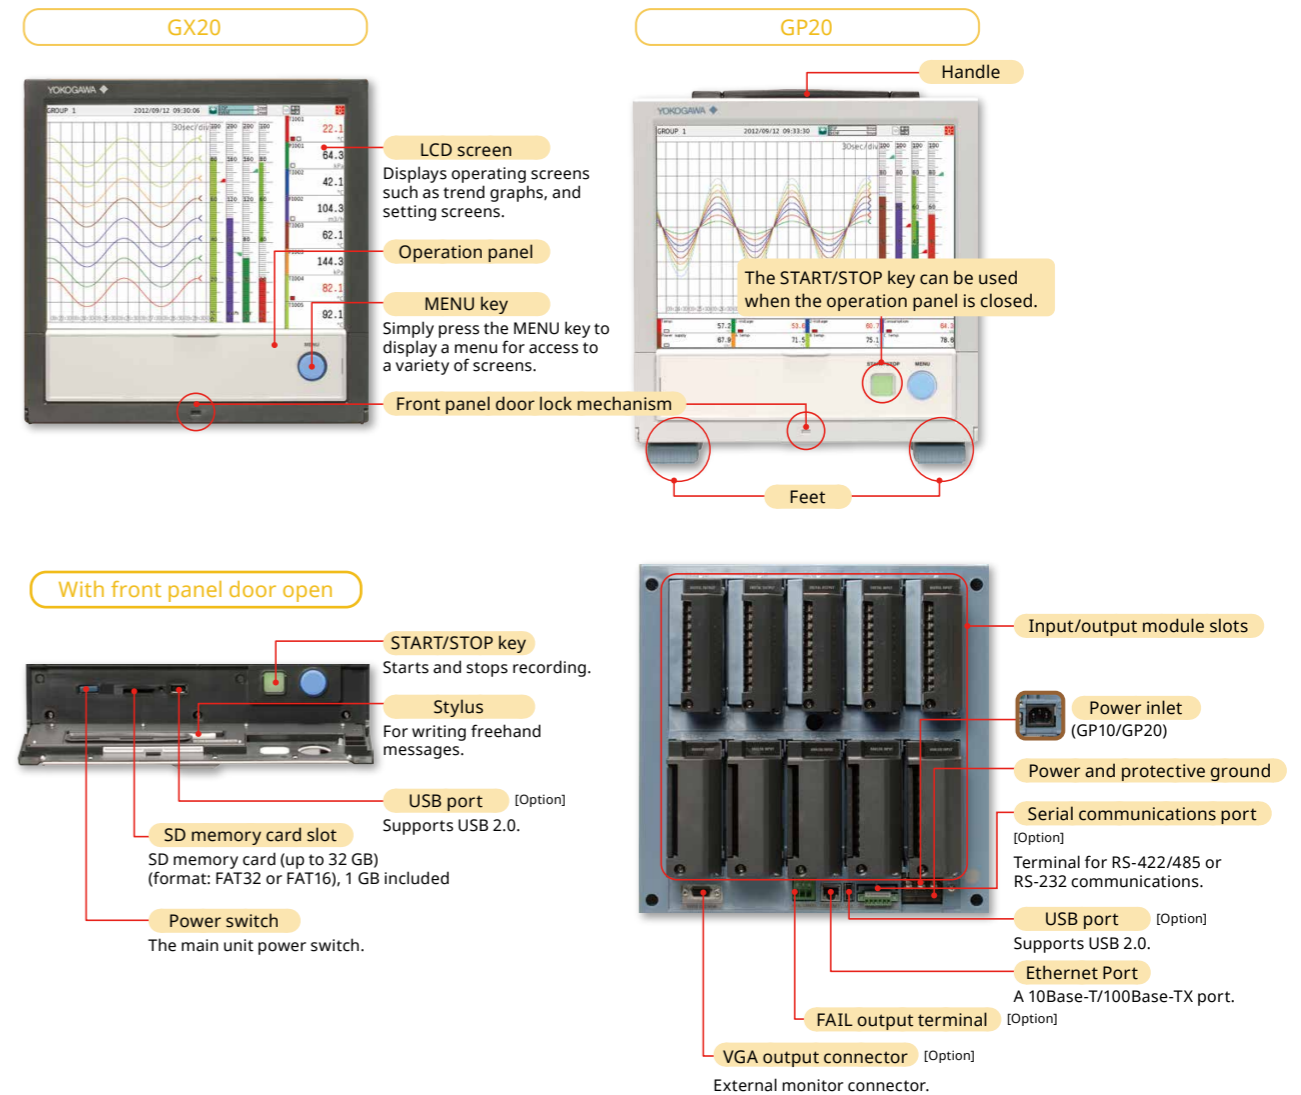


Connect a mouse and keyboard for a "PC feel"

USB interface (/UH option)

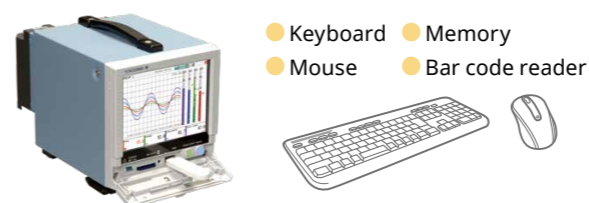

Choose by mounting design and application




Cover color (/BC option)(GX)



Portable models (GP10/GP20)

Runs on DC12 V power for in-vehicle data acquisition.

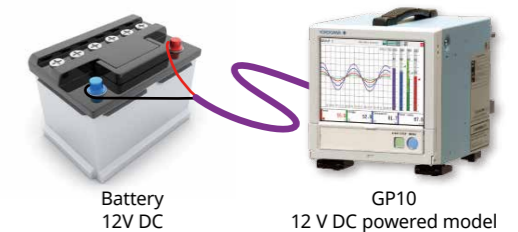

Easy-to-read display

- GX20/GP20:12.1" TFT color LCD, 800 x 600 dots
- GX10/GP10:5.7" TFT color LCD, 640 x 480 dots





A full range of network functions and software

Smart Functionality



Predictive monitoring with AI

Equipment/Quality Easy Predictive Detection


* Creating predictive detection models and profile waveforms requires the Equipment/Quality Predictive Detection tool (sold separately).

Health Monitor Function

By easily creating predictive detection models from past recorded OK/NG data and loading it into GX/GP, you can detect prediction of abnormalities in manufacturing equipment and product quality degradation at an early stage. And because health scores which show the degree of normal and abnormal data consider correlations among multiple data to make determinations, they can capture prediction of abnormalities that are difficult for humans to detect.

- Maximum number of channels: 20
- Shortest recording interval: 100 ms
- Target channels: I/O channel, math channel, and communication channel

*"NG" means Not Good.


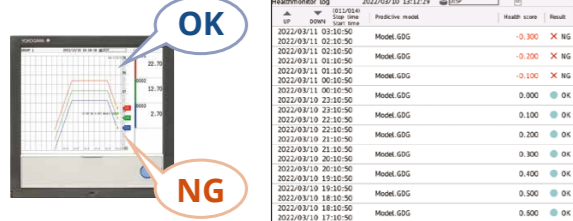


Profile Function

By creating a profile waveform from past recorded data and loading it into GX/GP, this waveform can be used as a threshold for process values. Profile waveforms are useful in applications where process values change over time. Also, you can see the deviation from the reference waveform on the screen.

- Maximum number of channels: 20
- Shortest recording interval: 500 ms

* /MC option required

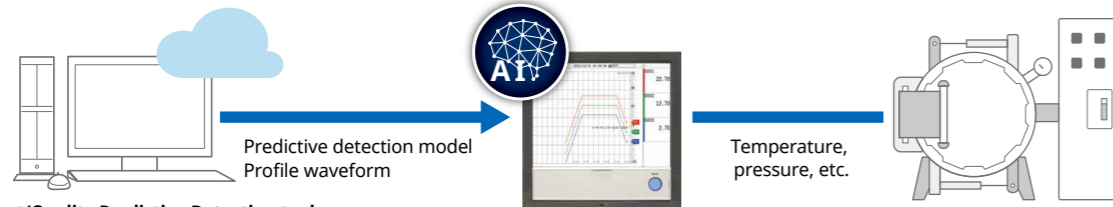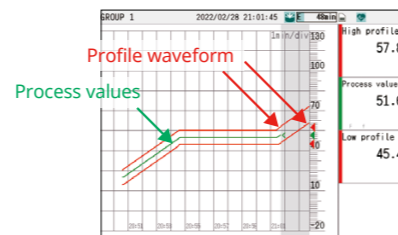

Equipment/Quality Predictive Detection tool

* Certain restrictions apply with Equipment/Quality Easy Predictive Detection. See the general specifications for details.

Draw predicted future data with AI

Future Pen

Use acquired data to predict future data, and display predicted future waveforms along with real time data on the trend monitor. Predicted future waveforms help you identify and deal with likely problems as soon as possible.


- Max. channels: 10
- Shortest recording interval: 1 sec.
- Prediction range: Recording interval x 60 points



Future alarms

You can set future alarms based on future data predicted by the future pen.

When a future alarm occurs, notification can be sent by external (digital) output or email.

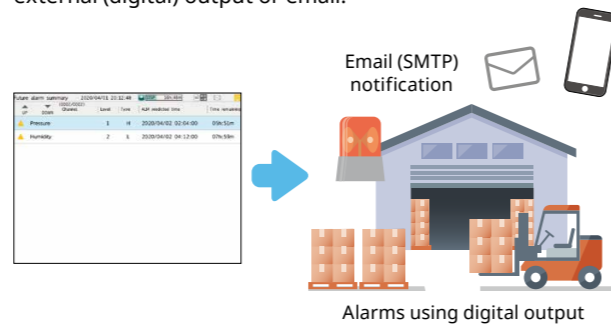


* Effective for relatively slowly fluctuating data. Not suitable for rapidly fluctuating data.
* Certain restrictions apply with the future pen function. See the general specifications for details.

Dedicated software (free download) is available for loading waveforms and GX/GP settings


Universal viewer

Data files saved on the GX/GP can be viewed and printed. You can perform statistical computation over an area and export to ASCII, Excel, or other formats.

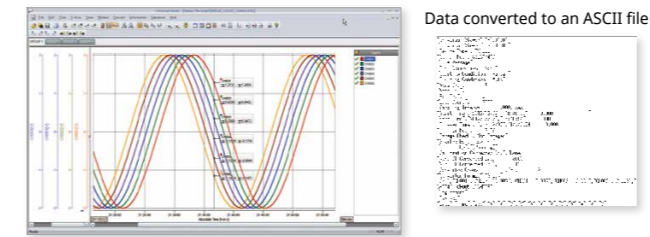

Offline setting software


Save settings or transfer them to the GX/GP.

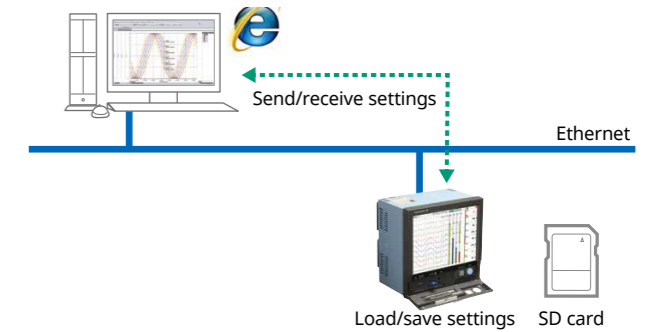


Real time remote monitoring from a web browser

Through a Web browser you can monitor the GX/GP in real time and change settings. You can easily build a seamless, low-cost remote monitoring system with no additional software.

Real time monitoring screen

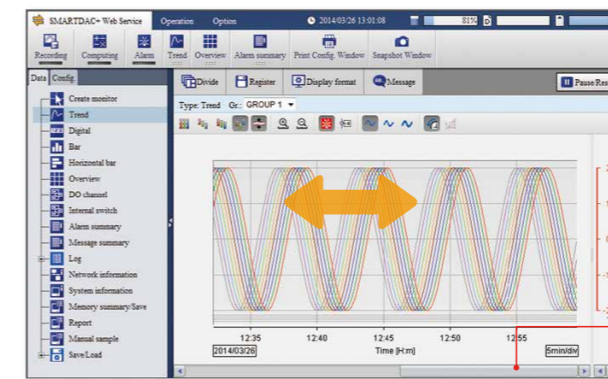


You can view monitor screens in real time that are identical to the trends, digital, and other displays on the GX/GP main unit.

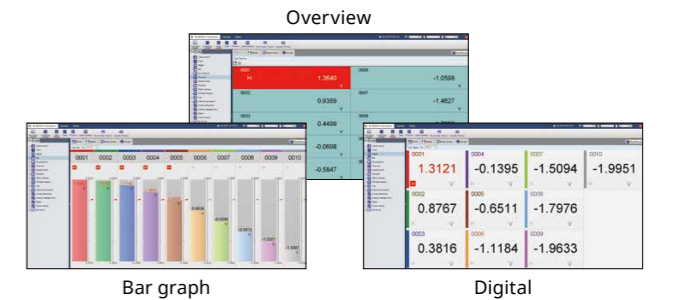


With the scroll bar, you can seamlessly scroll between past and current trends. When the sampling interval is 1 second, the instrument displays 1 hour's worth of historical trends.

Enter settings online with a web browser

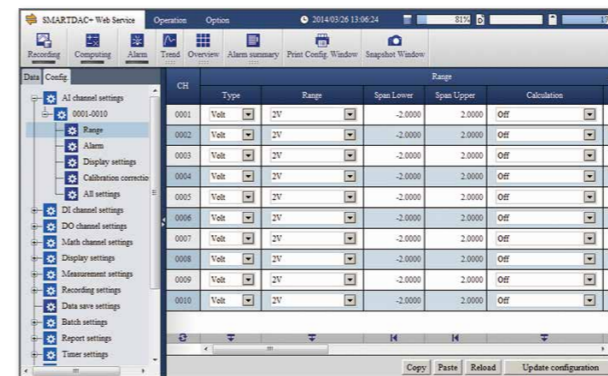


The setting screen lets you copy AI channel settings and other information to Excel for editing. You can reimport the data into the setting screen after editing.

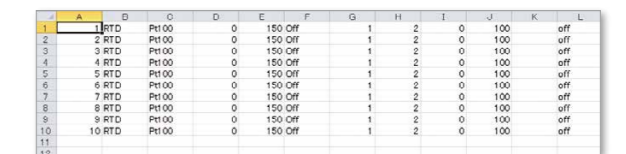

Mobile Web

Enables monitoring from a tablet

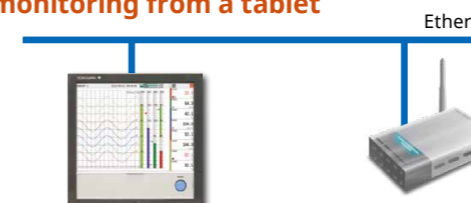

Enables monitoring via Wi-Fi



Supports the aerospace industry's AMS2750/NADCAP and the automotive industry's IATF16949/CQI-9 for heat treatment applications


Calibration correction schedule control function (/AH option)

Schedule management for periodically executing calibration correction configuration and the like. The correction factor can be set separately for unit and sensor dependency. For AMS2750, we offer TUS software* that can easily create TUS (Temperature Uniformity Survey) reports.

* For information on TUS software, contact your Yokogawa representative.

Furnace 1 Calibration Time until due date: 63 min	Furnace 4 Calibration Time until due date: 7 min
Furnace 2 Calibration Time until due date: 70 min	Furnace 5 Calibration Time until due date: 28 min
Furnace 3 Calibration Time until due date: 0 min	Furnace 6 Calibration Time until due date: 35 min

Calibration Reminder Screen



Message to prompt calibration

Due date setting

Schedule number: 1

Reminder function: On/Off

Due date: 2015/10/28

Calibration schedule setting

PID control function

Control function

Enables PID and program control

- PID control module
2-loops per module, up to 20 loops per system
- Setpoint program control function (/PG option)
Up to 99 patterns




Proprietary A/D




GX90OUT PID control module

Remote operation and monitoring

The web application enables remote operation and monitoring from a browser.



With the Web Server function, simply access the GX/GP from a web browser on a PC for easy operation and monitoring of control loops.

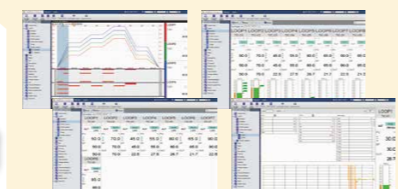

Built in control screens and display

Various pre-configured control screens and display are available.

Run programs (/PG)

Tuning

Control overview

Control alarm summary

Control groups

Controller

Face plate

Control operation summary

Select programs

Application examples

Industrial furnace

- Ideal for centralized control of multiple loops
- Modular structure makes for easy maintenance of individual loops

Utility equipment

- Simplifies loop control and remote monitoring of utility equipment
- Readily scalable for additional loops



Engine endurance test bench

- Measures evaluation data while generating test patterns

Record data in separate files per equipment set

Multi-batch Function (/BT option)

Recorder pre-defined channel groups to separate data files with independent start and stop control. Up to 12 independent batches can be created.

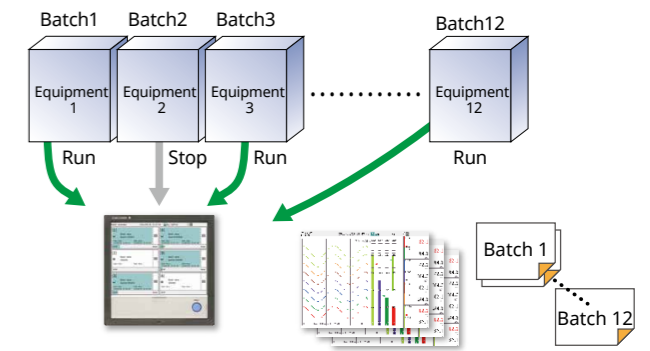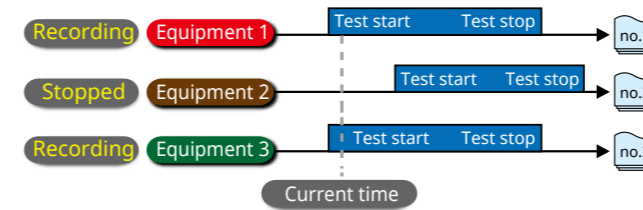


High speed measurement (down to 1 ms)

Yokogawa's proprietary A/D converter allows the high speed module to measure data points as fast 1ms.

- High speed (1 ms) measurement*
- Proprietary A/D converter

* With 1ch per module.
At 2 ms, 2 ch per module, and at 5 ms or more, all 4 ch per module.

Model	Scan interval		
	1ms	5ms	10ms
GX/GP10	1ch	5ch	10ch
GX20-1/GP20-1	1ch	5ch	10ch
GX20-2/GP20-2	5ch	25ch	40ch



Proprietary A/D



GX90XA-04-H0
Analog input module (high speed AI)

Dual interval measurement with two different scan intervals

Users have the ability to choose two different scan intervals on a single GX/GP system. This allows users the flexibility to measure various types of inputs with two different scan intervals in a single system. For example, this provides for efficient, simultaneous measurement of signals with slow fluctuations such as temperature, and fast-changing signals such as pressure and vibration. Modules can be assigned to measurement groups.

2 measurement groups

Measurement group 1
Measurement group 2

Easily switch groups

Channels for measurement group 1

Simply swipe to switch measurement groups.

Channels for measurement group 2

Superimpose data on Universal Viewer

With Universal Viewer, you can superimpose measured data from 2 measurement groups.

Measurement group 1 (File1-1, File1-2, File1-3)

Measurement group 2 (File2)

Superimposed

Universal Viewer

Application examples

Acquire temperature and vibration data from power plant turbines

- Monitoring and recording of alarms when abnormal temperature or vibration are detected
- At 5 ms sampling, reliably detect abnormalities
- Dual interval multipoint measurement

Measures LCD projector overheating

- Evaluates the rise in temperature of parts near the projector lamp, and the drop in temperature after powering OFF
- At 10 to 1 ms sampling, record steep temperature changes in detail


Car battery charge/discharge test

- Measures transient current during charging and discharging
- Sampling requirement: 1 ms

MATH (including reports), and event actions


MATH function (/MT option)

Supports various kinds of math computation, including basic math and functions (square root, logarithms, F value, elapsed time, etc.). Elapsed time calculation allows you to measure the amount of time elapsed after a condition is met. Write formulas using variables for measured or computed data and save or display the results—this saves time and effort on post-processing. Create hourly, daily, monthly, and other reports with the Report function.

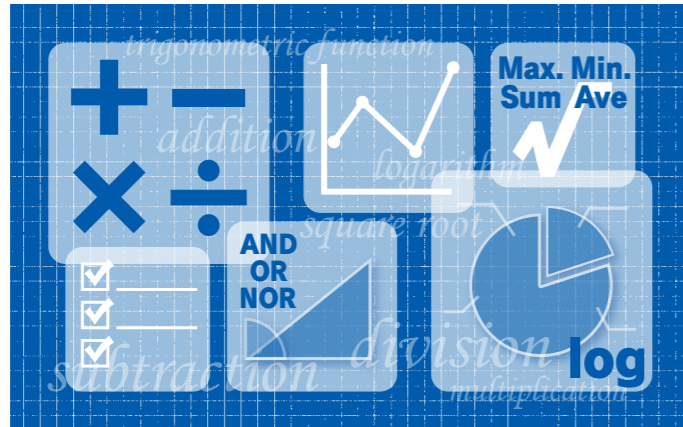


Event actions

Ability to assign actions tied to specific events during the operation of the data acquisition station.

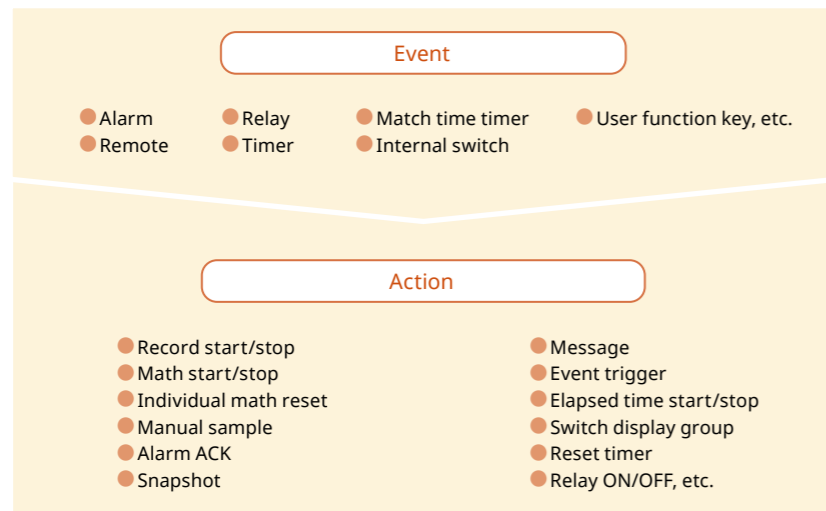

Report creation and network functions (/MT option)

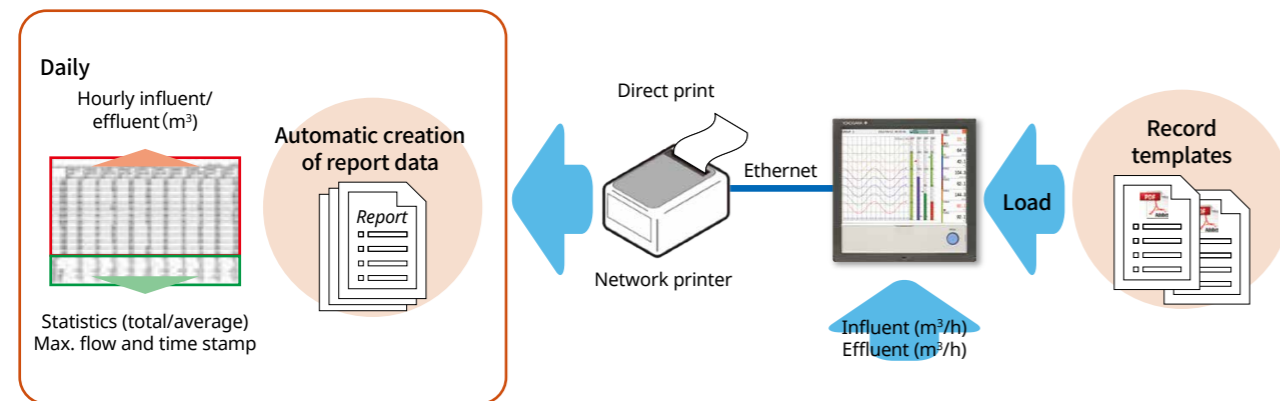


Provides a variety of convenient networking functions

Networking

Modbus/TCP and Modbus/RTU communications

GX/GP supports Modbus TCP/IP client and server modes for Ethernet communications and Modbus RTU master and slave modes for optional serial communications.


Modbus/TCP (Ethernet connection), Modbus/RTU (RS-422/485 connection)

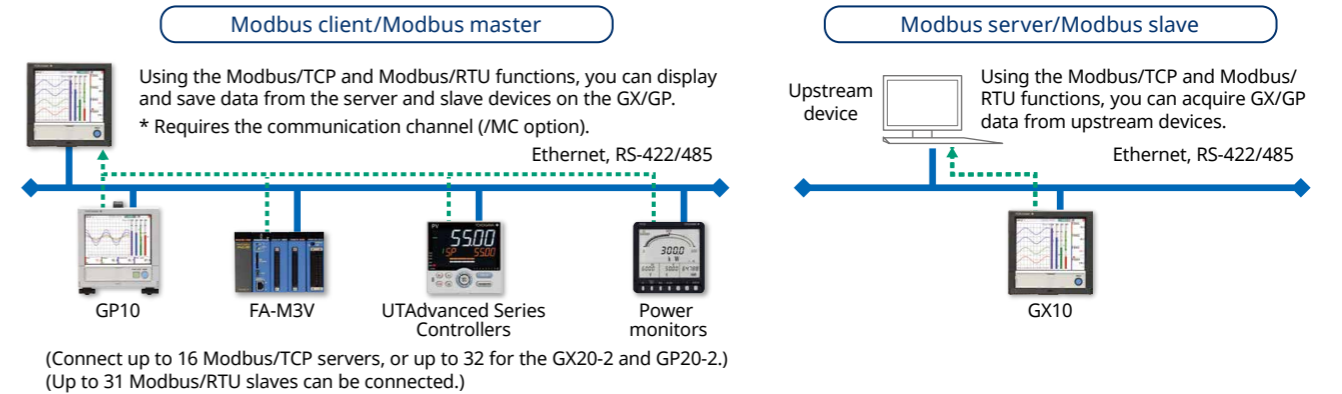

EtherNet/IP function (/E1 option)

GX/GP supports EtherNet/IP server functions. You can access GX/GP from PLCs or other devices and load measurement/MATH channels or write* to communication input channels (GX10/GP10: max. 50 ch, GX20-1/GP20-1: max. 300 ch, GX20-2/GP20-2: max. 500 ch).


* Communication channel function (/MC option) is required.

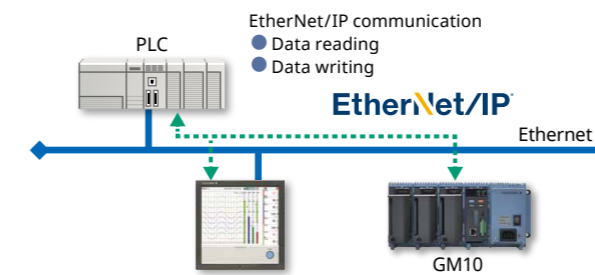

PROFINET communication (GX90NW Network Module)


By using the GX90NW network module, you can connect the GX/GP as a secondary I/O device via PROFINET. You can access the GX/GP from the PLC or other I/O controller, read measurement/math channels, and write to communication channels*. You can easily perform necessary operations for batch processes from the PLC.

* Communication channel function (/MC option) is required.

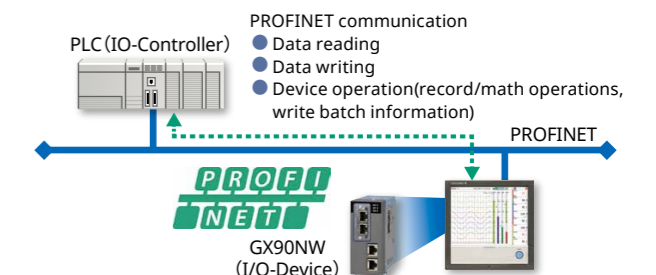

OPC-UA Server (/E3 option)


Data acquired by the GX/GP can be accessed through Ethernet communication from a host system (OPCUA client). Writing from an upstream system to a GX/GP communication channel requires the communication channel function (/MC option).

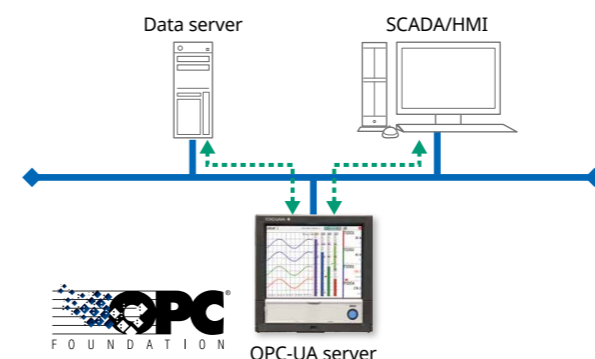

DARWIN-compatible communication

The GX/GP supports DARWIN communication commands. Use your current DARWIN communication programs as-is on the GX/GP.*


* See your dealer or nearest Yokogawa representative for details.

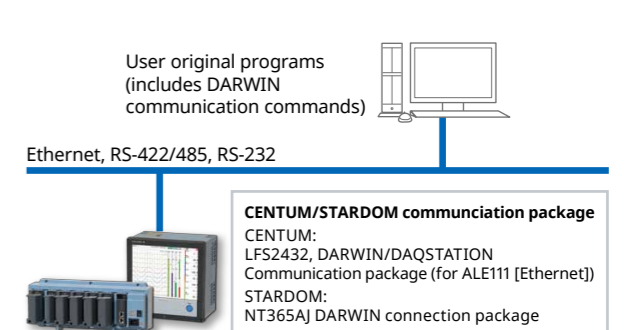

CC-Link family SLMP communication (/E4 option)

Protocol function that enables connection from a GX/GP to Mitsubishi Electric PLCs without sequencer programs. You can run the GX/GP as an SLMP client, enabling writing of GX/GP measured data to the PLC and writing of PLC data to communication channels.*

*Requires the communication channel function (/MC option).

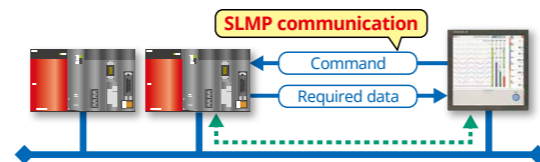

Powerful tool for instrument performance evaluation testing (/E2 and /MC options)


Highly precise measured data from power measuring instruments (WT series power analyzers) can be acquired without loss of fidelity on the GX/GP, and recorded and displayed alongside the GX/GP's own measured data. This is ideal for performance evaluation testing because you can record instrument power consumption, temperature, and other phenomena simultaneously.

Models that can be connected

Yokogawa Meters & Instruments Corp., WT series power analyzers, WT300/WT300E (command mode WT300), WT500 WT1800/WT1800E (command type WT1800)


Max. no. of connections

8 (GX10/GP10), 16 (GX20/GP20)

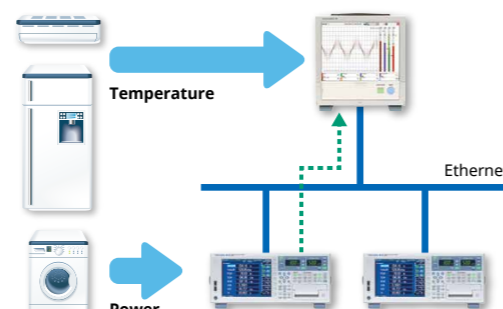

FTP-based file transfer

The FTP client/server functions allow you to easily share and manage data from a centralized file server.

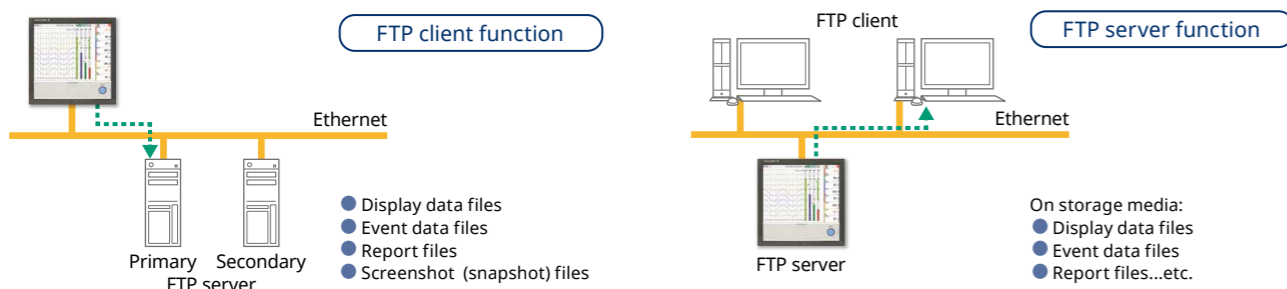


E-mail messaging function

The GX/GP can send a variety of informative e-mail messages that include alarm notification reports, periodic instantaneous data values, scheduled report data and other information.


Sending e-mail using an existing mail system

In this type of setup, e-mail messages are sent through an existing mail server (SMTP server).

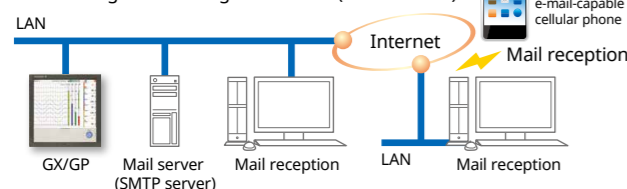


Automatic network setup (DHCP) function

Using Dynamic Host Configuration Protocol (DHCP), the GX/GP can automatically acquire the settings it needs (IP address) for network communications from a DHCP server. This makes it easier than ever to install the unit on a plant network.

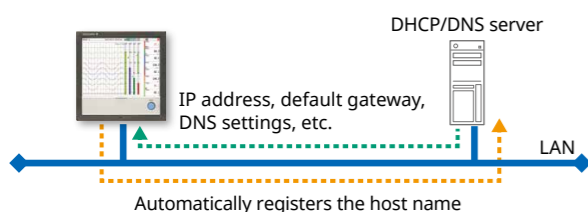

Time synchronization with network time servers

GX/GP uses SNTP protocol in client mode to acquire time information from a network time-server. This function allows any number of GX/GP units within a facility to have precisely synchronized time; all units will record data with coordinated date and time stamp information. In addition, GX/GP can function as a server, providing time data to other SNTP client units on the network.

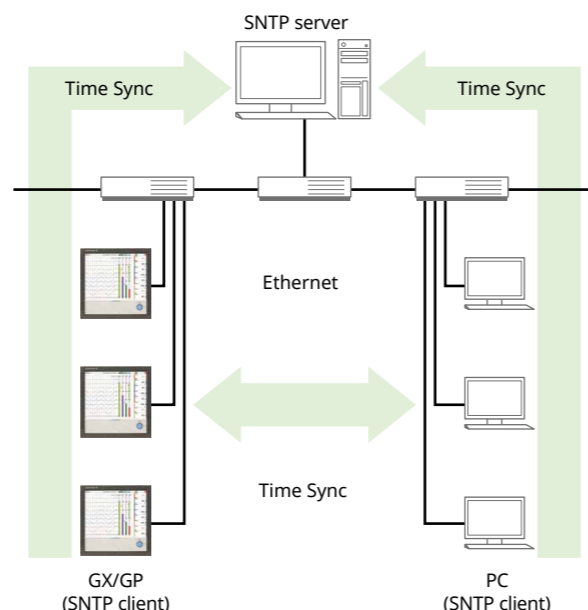


Rock-solid hardware and highly secure

Reliability and durability

Be confident that recorded data is saved

Measured and calculated data is continuously saved to secure, internal non-volatile memory. At manual or scheduled intervals, the files in memory are copied to the removable media. In addition, the files can be copied and archived to an FTP server.

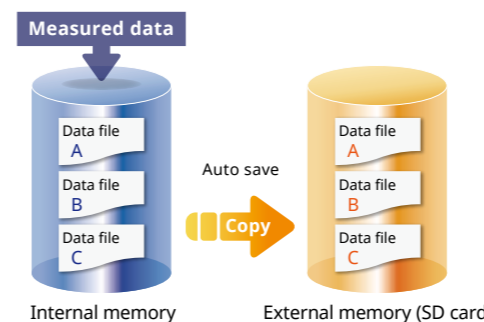

Because of the inherent reliability and security of non-volatile memory, the possibility of losing data under any operating condition or power failure event is extremely small.

High Capacity Internal Memory

Even longer recording durations, and multichannel recording.

Display data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.	
Internal Memory	500 MB
Display update (minute/div)	30 minutes
Sampling period (s)	60 s
Total sample time	Approx. 2.5 years

Event data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.	
Internal Memory	500 MB
Sampling period (s)	1 s
Total sample time	Approx. 1 months

Security enhancements


Safely sends and receives customer data.

SSL support function

- FTP client
- SMTP client
- FTP server
- HTTP server

Digital signatures


- Add electronic signatures to records (PDF)

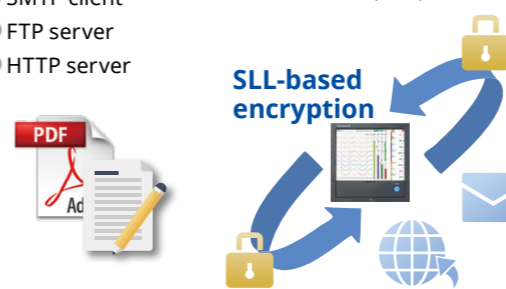

SSL: An encryption protocol for data sent over TCP/IP networks.

Select file formats according to your application

For increased security, measured data can be saved in binary format. This format is very difficult to decipher or modify in traditional text editors or other programs. To enable easy and direct opening of the data in text editors or spreadsheet programs, choose text format. This allows you to work with your measurement data without dedicated software.

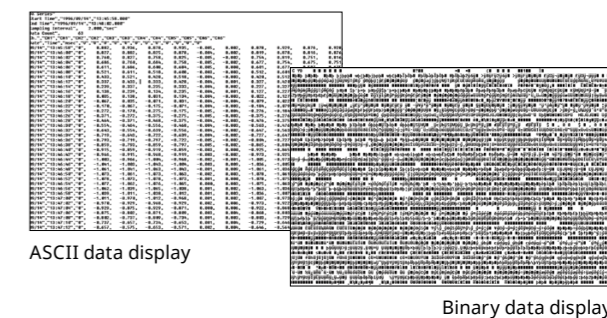


21 CFR Part 11 support (/AS option)

With the advanced security function, it supports US FDA 21 CFR Part 11 (regulations on electronic recording and electronic signatures) and the Japanese Ministry of Health, Labor, and Welfare's ER/ES guidelines. It also supports data integrity in accordance with ALCOA mentioned in PIC/S, WHO, MHRA and FDA guidance documents. It gives you access to a credential-based login function, electronic signatures, audit trails, an anti-tampering function, an Active Directory-based password management function, a sign-in function, and other security features.



FDA 21 CFR PART 11

Front panel door lock



The front panel door can be locked to prevent mishandling of the power switch or external media.

Analog front end module

A proprietary A/D converter delivers high speed, high precision data acquisition. (High-speed AI, PID Control module)






Reliable dust- and splash-proof construction

Dust and splashproof front panel (Complies with IEC529-IP65 and NEMA No. 250 TYPE 4*)


With its IEC529-IP65 compliant front panel, the GX is ready for use in harsh environments.

* Except the external icing test




High environmental worthiness for use in most any setting

The protective sheets on the touch panel display have a special coating on the front and back to prevent damage from scratches, chemicals, and solvents while maintaining a high display clarity and resistance to light interference.

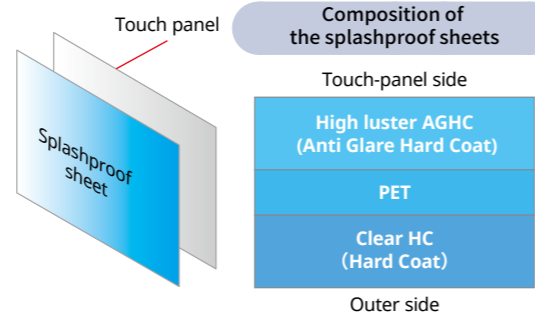


Multitouch operation even with gloves on

Traditional resistive touch screens can detect only one touch point. The built-in controller and algorithm of the GX/GP can detect two touch points, allowing intuitive pan and zoom functions during trend monitoring—a first among paperless recorders.

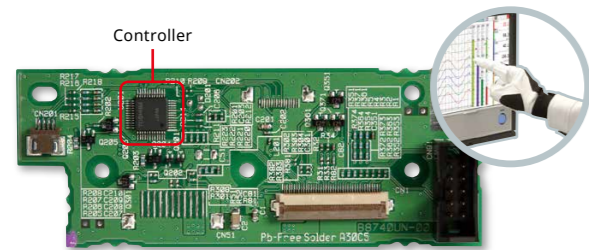

Heat dissipating construction

The GX/GP was built for heat dissipation to ensure an even temperature distribution between module terminals.

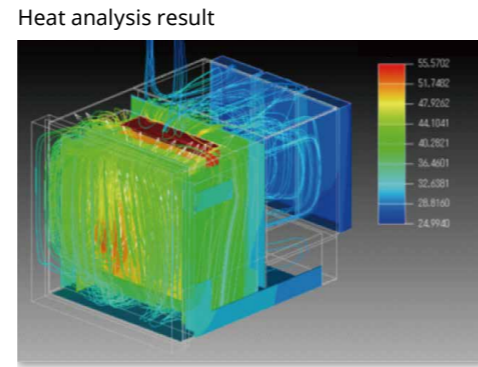

Actual values support high precision measurement

The measuring accuracies noted in the general specifications have a margin of error that takes into account the product's components and the equipment used for adjustment and testing. However, the actual values calculated from the accuracy testing data upon shipment of the instrument from the factory are as follows.

	Input type	Measuring accuracy*1 (typical value*2)
DCV	20mV	± (0.01% of rdg + 5 μV)
	60mV	± (0.01% of rdg + 5 μV)
	6V (1-5 V)	± (0.01% of rdg + 2 mV)
TC*3	R, S	± 1.1°C
	B	± 1.5°C
	K (-200.0 to 1370.0 °C)	0.0 to 1370.0°C : ± (0.01% of rdg + 0.2°C) -200.0 to 0.0°C : ± (0.15% of rdg + 0.2°C)
	K (-200.0 to 500.0 °C)	0.0 to 500.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.15% of rdg + 0.2°C)
	J	0.0 to 1100.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.10% of rdg + 0.2°C)
	T	0.0 to 400.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.10% of rdg + 0.2°C)
RTD	N	0.0 to 1300.0°C : ± (0.01% of rdg + 0.2°C) -200.0 to 0.0°C : ± (0.22% of rdg + 0.2°C)
	Pt100 (-200.0 to 850.0 °C)	± (0.02% of rdg + 0.2°C)
	Pt100 (high resolution) (-150.00 to 150.00 °C)	± (0.02% of rdg + 0.16°C)

*1 Applies to GX90XA-10-U2, A/D integration time 16.67 ms or more, General operating conditions: 23 ± 2 °C, 55 ± 10% RH, supply voltage 90-132, 180-264 V AC, power frequency within 50/60 Hz ± 1%, warm-up of 30 minutes or more, no vibrations or other hindrances to performance.

*2 For the measuring accuracy (guaranteed), see the module's general specifications (GS 04L53B01-01EN).

*3 These values do not include the reference junction compensation accuracy.

Model	GX20	GP20	GX10	GP10
Construction	Vertical panel mount	Portable	Vertical panel mount	Portable
Panel thickness	2 to 26 mm		2 to 26 mm	
Display	12.1" TFT color LCD (800 × 600 dots)		5.7" TFT color LCD (640 × 480 dots)	
Touch screen	4 wire resistive touch screen, 2-point touch detection			
Max. no. of connectable modules	10 (When mounted on expansion module: 9)		3 (When mounted on expansion module: 2)	
	* The maximum number of connectable modules is limited by the maximum number of I/O channels, and differs depending on the types and combinations of modules.			
Analog input channels	Standard: 100, Large memory: 450 (with expansion unit)		Standard: 30, 100 (with expansion unit)	
No. of mathematical channels	GX20-1, GP20-1: 100, GX20-2, GP20-2: 200		50	
No. of communication channels	Standard: 300, Large memory: 500		50	
Internal memory (flash memory)	Standard: 500 MB, Large memory: 1.2 GB		500 MB	
External storage media	SD memory card (up to 32 GB) (format: FAT32 or FAT16), 1 GB included USB interface (/UH option): USB 2.0 compliant (external storage media: USB flash memory) (Keyboard/mouse: HID Class Ver. 1.1 compliant)			
Communication functions	Ethernet (10BASE-T/100BASE-TX), IEEE802.3 compliant (Ethernet frame type: DIX) Connecting configuration: Cascade max. 4 level (10BASE-T), max. 2 level (100BASE-TX), segment length: Max. 100 m E-mail inform function (E-mail client), FTP client function, FTP server function, Web server function, SNTP client function, SNTP server function, DHCP client function Modbus/TCP (client/server functions) *MC option is required.			
Options	Serial communications (/C2: RS-232, /C3: RS-422 or RS-485), Modbus/RTU (master/slave functions) EtherNet/IP communication (PLC communication protocol) (/E1), WT communication (/E2), OPC-UA server (/E3), SLMP communication (Mitsubishi PLC) (/E4)			
Other functions	Security functions: Key lock function, login function, Clock functions: With calendar function, accuracy: ± 5 ppm (0 to 50°C), LCD saver function			
Rated supply voltage	100 to 240 VAC (allowable power supply voltage range: 90 to 132 VAC, 180 to 264 VAC) 12 VDC (allowable power supply voltage range: 10 to 20 VDC, only for a GP10 of power supply voltage code "2")			
Rated supply frequency	50/60 Hz			
Power consumption	Max. 90 VA (100 VAC), max. 110 VA (240 VAC)		Max. 45 VA (100 VAC), max. 60 VA (240 VAC)	
Insulation resistance	Between the Ethernet, RS-422/485, and each insulation terminal and earth: 20 MΩ or greater (at 500 VDC)			
Withstand voltage	Between the power terminal and earth: 3000 V AC (50/60 Hz) for one minute			
External dimensions (W × H × D)	Main Unit	288 × 288 × 169 (mm)	288 × 318 × 197 (mm)	144 × 144 × 174 (mm)
Including modules		288 × 288 × 220 (mm)	288 × 318 × 248 (mm)	144 × 144 × 225 (mm)
Weight (main unit only)		Approx. 6.0 kg	Approx. 5.4 kg	Approx. 2.1 kg
				Approx. 1.9 kg

Analog input module (Universal input module)

Model	GX90XA												
	DC voltage, standard signal, thermocouple, RTD*1, DI, DC current*2, resistance*3												
Input type (Inputs: 4/6/10)	DC voltage	20 mV, 60 mV, 200 mV, 1 V, 2 V, 6 V, 20 V, 50 V, 100 V*4				RTD	Pt100, JPt100, Cu10 GE, Cu10 L&N, Cu10 WEED, Cu10 BAILEY, Cu10 (20°C) α=0.00392, Cu10 (20°C) α=0.00393, Cu25 (0°C) α=0.00425, Cu53 (0°C) α=0.00426035, Cu100 (0°C) α=0.00425, J263B, Ni100 (SAMA), Ni100 (DIN), Ni120, Pt25, Pt50, Pt200 WEED, Cu10 GOST, Cu50 GOST, Cu100 GOST, Pt46 GOST, Pt100 GOST, PT500*3, PT1000*3						
	Standard signal	0.4-2 V, 1-5 V											
	Resistance	20, 200, 2000 Ω											
	Thermocouple	R, S, B, K, E, J, T, N, W, L, U, W97Re3-W75Re25, KpvsAu7Fe, Platinel 2, PR20-40, NiNiMo, W/WRe26, N(AWG14), XK GOST				DI	Level, Contact						
					DC current	0-20 mA, 4-20 mA							
Scan intervals	1/2/5/10/20/50/100/200/500ms, 1/2/5s												
	Scan interval by type												
	Suffix code	Scan interval											
		1ms	2ms	5ms	10ms	20ms	50ms	100ms	200ms	500ms	1s	2s	5s
	-U2	—	—	—	—	—	—	—	○	○	○	○	○
	-C1	—	—	—	—	—	—	—	○	○	○	○	○
	-L1	—	—	—	—	—	—	—	—	○	○	○	○
	-T1	—	—	—	—	—	—	—	—	—	○	○	○
	-H0	○	○	○	○	○	○	○	○	○	○	○	○
	-R1	—	—	—	—	—	—	—	○	○	○	○	○
	-V1	—	—	—	—	—	—	—	○	○	○	○	○
	Power supply and consumption	Supplied from main unit, power consumption: 2 W or less											
Insulation resistance	Between input circuits and internal circuitry : 20 MΩ or greater (at 500 V DC)												
Withstand voltage	Between the input circuits and the internal circuitry: 3000 VAC for one minute (current input type and low withstand voltage type: 1500 VAC for one minute, high withstand voltage type: 3700 V AC for one minute) Between analog input channels: 1000 V AC for one minute (excluding b terminals for universal input type) (low withstand voltage type: 400 VAC for one minute, high speed universal type: 3000 V AC for one minute)												
Terminal types	M3 screw terminals or clamp terminals												
Weight	Approx. 0.3 kg												

*1 Cannot be set for the current input type (type suffix code: -C1), electromagnetic relay type (type suffix code: -T1), low withstand voltage type (type suffix code: -L1) or high withstand voltage type (type suffix code: -V1).

*2 Can only be set with current input type (type suffix code: -C1).

*3 Can only be set with 4-wire RTD/resistance type (type suffix code: -R1).

*4 Can only be set with high speed universal type (type suffix code: -H0).

Analog output module

Model	GX90YA
Output type (outputs: 4)	Transmission output, manual output
Range	4–20 mA or 0–20 mA
Output update interval	100 msec (shortest)
Load resistance	600 Ω or less
Resolution	0.002%
Power supply and consumption	Supplied from main unit, power consumption: 3W or less
Insulation resistance	Between output circuits and internal circuitry: 20 MΩ (at 500 VDC) Between output channel terminals: 500 VDC, 20 MΩ or greater
Withstand voltage	Between output circuits and internal circuitry: 1500 AC for one minute Between output circuits: 500 VAC for one minute
Terminal type	M3 screw terminals or clamp terminals
Weight	Approximately 0.2 kg

Digital input module

Model	GX90XD
Input types (inputs: 16)	DI or pulse input*1 (Open collector or non-voltage contact) Open collector : Voltage of 0.5 V DC or less when ON, leakage current of 0.5 mA or less when OFF Non-voltage contact : Resistance of 200 Ω or less when ON, 50 kΩ when OFF
Contact rating	12 V DC, 20 mA or more
Power supply and consumption	Supplied from main unit, power consumption : 0.7 W or less
Insulation resistance	Between input terminals and internal circuitry : 20 MΩ or greater (at 500 V DC)
Withstand voltage	Between input terminals and internal circuitry : 1500 V AC for one minute
Terminal types	M3 screw terminals or clamp terminals
Weight	Approx. 0.3 kg

Pulse input specifications*1

Counting system	The rising edge of the pulse is counted.
Max. pulse period	250Hz (The chattering filter : OFF) 125Hz (The chattering filter : ON)
Minimum detection pulse width	Low (close), High (open), both is 2 ms or more
Pulse detection period	1ms
Pulse measurement accuracy	± 1 pulse
Pulse count interval	Measurement interval
Filter	The chattering filter can be switched On/Off. (When the chattering filter is off, connect GX/GP so that it is not affected by the noise.)

*1 Integration requires the math function (/MT option).

Digital output module

Model	GX90YD
Output types (outputs: 6)	Relay contact (c contact)
Rated load voltage	30 V DC or 250 V AC or less
Max. load current	3 A (DC)/3 A (AC), resistance load, each channel
Power supply and consumption	Supplied from main unit, power consumption: 1.4 W or less
Insulation resistance	Between output terminals and internal circuitry: 20 MΩ (at 500 VDC)
Withstand voltage	Between output terminals and internal circuitry: 3000 V AC for one minute
Terminal types	M3 screw terminals
Weight	Approx. 0.3 kg

Expandable I/O

Model	GX60
Rated supply voltage	100 to 240 VAC (allowable power supply voltage: 90 to 132 VAC, 180 to 264 VAC)
Rated supply frequency	50 to 60 Hz
Power consumption	Max. 40 VA (100 VAC), max. 55 VA (240 VAC)
Insulation resistance	Between Ethernet terminal, isolated terminals, and ground 20 MΩ or more (at 500 VDC)
Withstand voltage	Between power terminal and ground: 3000 VAC (500/60 Hz)/1 min. Between I/O modules and ground: between each module's internal circuitry and depends on the specification of I/O module.
Weight	Approx. 3.2 kg (installing 6 modules)

Network Module

Model	GX90NW	
Ethernet port	Communication speed	10BASE-T/100BASE-TX (Auto)
	Port	2 ports
PROFINET port	Connection cable	STP cable, CAT5 or later
	Communication range	100m
PROFINET port	Communication speed	100BASE-TX full duplex
	Port	2 ports
PROFINET communication specifications	Connection cable	PROFINET communication cable
	Communication range	100m
Type: PROFINET IO-Device		
Conformance class: B		
Support for periodic and aperiodic communication		

Digital input/output module

Model	GX90WD	
Input type (inputs: 8)	ON/OFF detection	DI or pulse input*2 (Open collector or non-voltage contact) Open collector : Voltage of 0.5 V DC or less when ON, leakage current of 0.5 mA or less when OFF Non-voltage contact : Resistance of 200 Ω or less when ON, 50 kΩ when OFF
	Contact input rating	12 VDC, 20 mA or more
Output type (outputs: 6)	Rated load voltage	Relay contact (C contact) When connected to the main circuit (first-order power supply), 150 VAC or less When connected to a circuit derived from the main circuit (second-order power supply), 250 VAC or less (the main circuit is 300 VAC or less and uses an isolated transformer) or 30 VDC or less
	Max. load current	2 A (DC)/2 A (AC), resistive load
Power consumption	1.9 W or less	
Insulation resistance	Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)	
	Between output terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)	
Withstand voltage	Between input terminals and internal circuitry: 1500 VAC for one minute Between output terminals and internal circuitry: 3000 VAC for one minute	
Terminal types	M3 screw terminals	
Weight	Approx. 0.3 kg	

Each unit (GX/GP main unit and expandable I/O), can use 1 module only.

Pulse input specifications

Please see the pulse input specifications of Digital Input Module.

*2 Integration requires the math function (/MT option).

Pulse Input Module

Model	GX90XP
Number of inputs	10
Measurement interval	100 ms (shortest)
Input type	Contact (open collector, voltage-free contact), level (5 V logic)
Input range	Up to 20 kHz* * 30 Hz when the chattering filter is in use (On)
Minimum detection pulse width	25 μs* * 15 ms when the chattering filter is in use (On)
Measurement accuracy	Count ± 1 pulse During integration, the following accuracies are added. Upon MATH start: +1 measuring period Upon MATH stop: -1 measuring period * Integration requires the math function (optional code /MT).
Chattering filter	Removes chattering up to 5 ms (can be turned on/off on each channel)
Hysteresis width	Approx. 0.2 V
Contact, transistor rating	Contact: 15 V DC or higher and 30 mA or higher rating. Minimum applicable load current 1 mA or less. Transistor: With the following ratings: Vce>15 VDC, Ic>30 mA
Maximum input voltage	± 10 V DC
Insulation resistance	Between input terminals and internal circuitry: 20 MΩ or greater at 500 V DC
Withstand voltage	Between input terminals and internal circuitry: 1500 V AC for 1 minute

PID control module

Model	GX90UT	
Number of control loops	Number of loops	2
	Measured points	2
	Measurement type	DC voltage (DCV)/standardized signal, TC/RTD, DI (LEVEL and non-voltage contact)
Analog input (measured input)	Scan (control) interval	100 ms or 200 ms (system global setting)
	Outputs	2
Analog output (control output/transmission output/sensor power supply)	Output type	Power supply for current, voltage pulse, or sensors. Current output: 4–20 mA or 0–20 mA Voltage pulse output: ON voltage = 12 VDC or more (load resistance 600 Ω or more), OFF voltage = 0.1 VDC or less Can be used as a sensor power supply (13.0–18.3 VDC)
	Inputs	8
	Input format	Non-voltage contact and open collector Contact rating: 12 VDC or more, 20 mA or more
Digital output (of alarms, events, etc.)	Outputs	8
	Output format	Open collector (sink type)
	Output contact capacity	Max 24 VDC, 50 mA
Withstand voltage/insulation resistance	See PID control module general specifications (GS 04L51B01-31EN)	
Terminal type	M3 screw terminals	
Weight	Approximately 0.3kg	

GX10/GX20 MODEL AND SUFFIX CODES

Model	Suffix code	Optional code	Description
GX10			Paperless recorder (Panel mount type, Small display)*14
GX20			Paperless recorder (Panel mount type, Large display)*14
Type	-1		Standard (Max. measurement channels: 100 ch)
	-2		Large memory (Max. measurement channels: 500 ch)*12
Display language	E		English, degF, DST (summer/winter time)*10
Optional features	/AH		Aerospace heat treatment
	/AS		Advanced security function (Part 11)*20
	/BC		Black cover
	/BT		Multi-batch function*21
	/C2		RS-232*1
	/C3		RS-422/485*1
	/CG		Custom display*15
	/D5		VGA output*2
	/E1		EtherNet/IP communication (PLC communication protocol)
	/E2		WT communication*13
	/E3		OPC-UA sever
	/E4		SLMP communication (Mitsubishi PLC)*23
	/FL		Fail output, 1 point
	/LG		Log scale
	/MT		Mathematical function (with report function)
	/MC		Communication channel function
/P1		24 V DC/AC power supply	
/PG		Program control function*22	
/UH		USB interface (Host 2 ports)	

GP10/GP20 MODEL AND SUFFIX CODES

Model	Suffix code	Optional code	Description
GP10			Paperless recorder (Portable type, Small display)*14
GP20			Paperless recorder (Portable type, Large display)*14
Type	-1		Standard (Max. measurement channels: 100 ch)
	-2		Large memory (Max. measurement channels: 500 ch)*12
Display language	E		English, degF, DST (summer/winter time)*10
Power supply	1		100V AC, 240V AC*16
	2		12 VDC*17
Power cord	D		Power cord UL/CSA standard
	F		Power cord VDE standard
	R		Power cord AS standard
	Q		Power cord BS standard
	H		Power cord GB standard*
	N		Power cord NBR standard
	W		Screw terminal, power cord not included
Optional features	/AH		Aerospace heat treatment
	/AS		Advanced security function (Part 11)*20
	/BT		Multi-batch function*21
	/C2		RS-232*1
	/C3		RS-422/485*1
	/CG		Custom display
	/D5		VGA output*2
	/E1		EtherNet/IP communication
	/E2		WT communication*13
	/E3		OPC-UA sever
	/E4		SLMP communication (Mitsubishi PLC)*23
/FL		Fail output, 1 point	
/LG		Log scale	
/MT		Mathematical function (with report function)	
/MC		Communication channel function	
/PG		Program control function*22	
/UH		USB interface (Host 2 ports)	

Analog input module, Digital I/O module:When the built-in module

Please add the following suffix codes to the main unit model and specification codes.

Option	Optional code	Description	Models and numbers of units of modules included in the main unit
Optional features (Analog input)*3*11	/UC10	With analog input module, 10 ch (Clamp terminal)	GX90XA-10-U2N-CN x 1
	/UC20	With analog input module, 20 ch (Clamp terminal)*7	GX90XA-10-U2N-CN x 2
	/UC30	With analog input module, 30 ch (Clamp terminal)*8	GX90XA-10-U2N-CN x 3
	/UC40	With analog input module, 40 ch (Clamp terminal)*5	GX90XA-10-U2N-CN x 4
	/UC50	With analog input module, 50 ch (Clamp terminal)*5	GX90XA-10-U2N-CN x 5
	/US10	With analog input module, 10 ch (M3 screw terminal)	GX90XA-10-U2N-3N x 1
	/US20	With analog input module, 20 ch (M3 screw terminal)*7	GX90XA-10-U2N-3N x 2
	/US30	With analog input module, 30 ch (M3 screw terminal)*8	GX90XA-10-U2N-3N x 3
	/US40	With analog input module, 40 ch (M3 screw terminal)*5	GX90XA-10-U2N-3N x 4
	/US50	With analog input module, 50 ch (M3 screw terminal)*5	GX90XA-10-U2N-3N x 5
	Optional features (Digital I/O)*4	/CR01	With digital I/O module, (Output:0, Input:16)*6 *9
/CR10		With digital I/O module, (Output:6, Input:0)*8 *9	GX90YD-06-11N-3N x 1
/CR11		With digital I/O module, (Output:6, Input:16)*7 *8 *9	GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 1
/CR20		With digital I/O module, (Output:12, Input:0)*6 *9	GX90YD-06-11N-3N x 2
/CR21		With digital I/O module, (Output:12, Input:16)*6 *9	GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 2
/CR40		With digital I/O module, (Output:24, Input:0)*6 *9	GX90YD-06-11N-3N x 4
/CR41		With digital I/O module, (Output:24, Input:16)*6 *9	GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 4

*1 /C2 and /C3 cannot be selected together.

*2 /D5 can be specified only for the GX20 or GP20.

*3 Only one option can be specified.

*4 Only one option can be specified.

*5 /UC40, /UC50, /US40 and /US50 cannot be specified for the GX10 or GP10.

*6 /CR20, /CR21, /CR40 and /CR41 cannot be specified for the GX10 or GP10.

*7 If /UC20 or /US20 is specified, /CR11 cannot be specified for the GX10 or GP10.

*8 If /UC30 or /US30 is specified, /CR01, /CR10 and /CR11 cannot be specified for the GX10 or GP10.

*9 A digital input module has M3 screw terminals.

*10 The Display language is selectable from English, German, French, Italian, Russian, Korean, Simplified Chinese, Traditional Chinese, Japanese. To confirm the current available languages, please visit the following website.
URL: <http://www.yokogawa.com/ns/language/>

*11 Universal type (type suffix code: -U2). If you need anything other than universal type, purchase it separately.

*12 Large memory type can be specified only for the GX20/GP20.

*13 /MC option must be separately specified when the WT communication is selected.

*14 To connect an expandable I/O, you will need one expansion module for the GX/GP.

*15 Creating custom displays requires DXA170 DAQStudio (sold separately).

(GX/GP does not have a creation function.)

*16 Power code can be specified the suffix code D, F, R, Q, H, or N.

*17 12 VDC power supply can be specified only for the GP10 without power code (suffix code: W).

*18 Optional code /MT (MATH) required if using the GX90XD's or GX90WD's pulse input.

*19 The /MT option (MATH) is required to perform pulse integration on GX90XP pulse input modules.

*20 When the Advanced Security function is ON the scan interval is 100 ms or more, and the Dual Interval function and PID modules are unavailable.

*21 When the Multibatch function is ON the scan interval is 500 ms or more, and the Dual Interval function is unavailable.

*22 Using the Program Control function requires the PID control module.


*23 /MC option must be separately specified when writing of PLC data to communication channels.

* When ordering units with built-in modules, the total number of channels allowed is 100 (10 modules) including any modules ordered individually.

Data Logging Software GA10 (sold separately)

Centrally acquire data from multiple devices on a PC

GA10 is a PC based software package that acquires real time data from SMARTDAC+ data acquisition systems and other devices connected to a network. Connected PCs can monitor real time and historical data, which can be stored on a PC harddrive or centrally on a network drive.

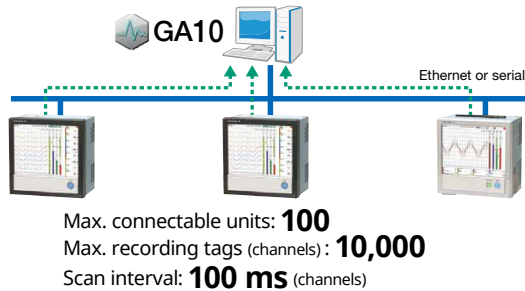

Compatible with other models in addition to the GX/GP!



Supports many other models. For details, see the GA10 catalog.

Aggregate data for monitoring!



Easy to read screen layouts provide operator friendly real time monitoring.

- Group channels any way you like
- Play back data up to recording start, even during measurement
- Instantly recognize alarms (in red)

Save the data all together!




Data is stored in a binary tamper proof format preventing unauthorized access. Data can also be exported to excel format for data manipulation and analysis.

Application example

Data monitoring in manufacturing sites


Monitor factory data from the office.
 You can also add clients and share data across multiple PCs.

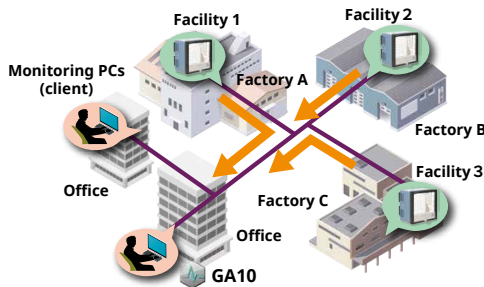

Effect: No more moving around large factories to do work!

Recording data from multiple equipments

Saves testing/manufacturing equipment data on a PC. In addition to simultaneous acquisition, you can acquire data from different equipment at different timing (multilogging).

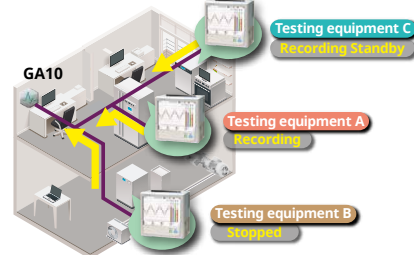

Effect: Manage all data on the PC, one set of equipment at a time!

WEB site

<http://www.smartdacplus.com/>



User Registration Request

Please register to the following Partner Portal Member Site. You can use various services such as confirmation of purchased product information, download of related materials and software.

Customer Portal Member Site >>> <https://myportal.yokogawa.com/>



OpreX™ Yokogawa achieves operational excellence by providing products, services, and solutions based on the OpreX comprehensive brand that cover everything from business management to operations.

Co-innovating tomorrow and Oprex are trademarks or registered trademarks of Yokogawa Electric Corporation. All brand or product names of Yokogawa Electric Corporation in this bulletin are trademarks or registered trademarks of Yokogawa Electric Corporation. All other company brand or product names in this bulletin are trademarks or registered trademarks of their respective holders.

NOTICE



Before operating the product, read the instruction manual thoroughly for proper and safe operation.

YOKOGAWA ELECTRIC CORPORATION
 YOKOGAWA CORPORATION OF AMERICA
 YOKOGAWA EUROPE B.V.
 YOKOGAWA ENGINEERING ASIA PTE. LTD.

<https://www.yokogawa.com/>
<https://www.yokogawa.com/us/>
<https://www.yokogawa.com/eu/>
<https://www.yokogawa.com/sg/>

Subject to change without notice
 All Rights Reserved. Copyright © 2012, Yokogawa Electric Corporation

AZ-S-2E
 Printed in Japan, 408(AZ) [Ed:14/d]